














ARWEI-REINSTREIFER DATA SHEET PORTAL planetLINE SZ 10

-  Static point loading up to 11,0 t per 80 cm²
-  Interior and roofed exterior
-  Suitable for wheelchairs
-  Suitable for heavy load
-  Rollable


Recommended for:

-  Private Homes
-  Office buildings
-  Kindergartens
-  Schools
-  Hospitals
-  Shopping centres
-  Public and fairground halls
-  Br-s1

Height	Bar spacing	Profile	Walking Area	Weight per m ²
10 mm	5 / 7 mm	Aluminum	OBJECT CARPET	approx. 9,2 kg (with 7 mm bar spacing)

System Design

- 1 OBJECT CARPET
- 2 Aluminum profile
- 3 ARWEI special connector, without cable connections
- 4 Scratching Edge

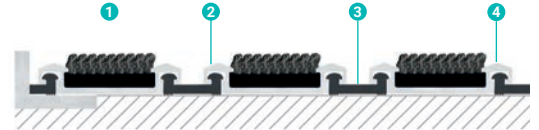


Characteristics

- Extreme high strength up to 11.000 kg per 80 cm² static point load
- OBJECT CARPET NEOO 1000: Blauer Engel, GUT, TÜV Nord suitable for allergic persons, TÜV PROFiCERT-product Interior PREMIUM

Advantages

- ARWEI-Reinstreifer is manufactured as a modular system. Every single part can be replaced easily on the spot.
- The cleaning pad is fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain. The Reinstreifer is drivable.
- OBJECT CARPET NEOO 1000 is a mono-material product. It is 100 % recyclable and completely circular. The material is developed for sustainable and healthy rooms, which is proven by different eco-labels. OBJECT CARPET NEOO 1000 has an excellent cleaning efficiency.
- OBJECT CARPET NEOO 1000 is certified according to „TÜV PROFiCERT-product Interior PREMIUM“ and therewith has approved the criteria „ENV1.2 Risks for the local environment“ of DGNB’s emission requirements.

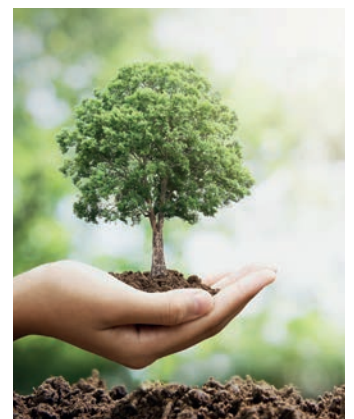

ARWEI Portal
planetLINE
recyclebar

Standard colours

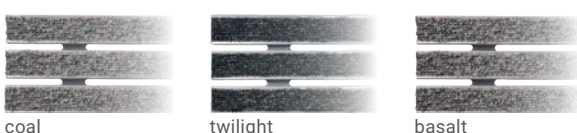


Illustration of colors not true to original.
On request you receive original samples promptly.

Tender specifications: Portal planetLINE SZ 10

High quality, especially wear-resistant entrance mat

Application:

Indoor and roofed exterior; normal up to extremely strong frequency, drivable with trolleys, pallet trucks, cars, etc.; suitable for wheelchairs, overall laying, Static point loading up to 11.000 kg per 80 cm²

Stripe profile: aluminum, extra strongly dimensioned, with scratching edges, sound insulated

Textile cleaning pad:

OBJECT CARPET NEOO 1000, 100 % PET, with 100 % recycled support material, hard-wearing value EN 1307 commercially strong (33), comfort value LC3; cleaning pad subsequently replaceable; 100 % recyclable, slip resistance R 12 according to DIN EN 16165; fire classification Bfl-s1 according to EN 13501-1

Textile cleaning pad OBJECT CARPET NEOO 1000: Blue Angel, GUT, TÜV Nord suitable for allergy sufferers, TÜV PROFiCERT-product PREMIUM

Colour fastness:

Rubbing fastness (DIN EN ISO 105-X12) Grade: ≥ 5 (very good)

Water fastness (DIN EN ISO 105-E01) Grade: ≥ 5 (very good)

Light fastness (DIN EN ISO 105-B02) Grade: ≥ 6 (good)

Connection: ARWEI Special Connectors; therefore easily to roll up, high slip resistance by anti-slip function; modular construction – no wire or cable connections -, each part can easily be replaced on the spot.

Height: 10 mm

Bar distance: 5 or 7 mm



Constructional and material changes in the course of further product development reserved. All dimensions are standard values without considering production engineering-related tolerances. They are based on our experience and testing. The variety of associated materials and working conditions that occur on jobsites are not checked in detail and cannot be influenced by us. The quality of your work depends on your own professional judgment and product usage. If in doubt of any application recommendation or instruction, conduct a small test or obtain technical advice. With the publication of this product data sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our Homepage under www.arwei.de.