









## ARWEI-PREMIUM-REINSTREIFER DATA SHEET TRADITION GCB 22

-  Static point loading up to 1,2 t per 80 cm<sup>2</sup>
-  High collection volume up to 8,6 litres per m<sup>2</sup>
-  Interior and roofed exterior
-  Exterior
-  Suitable for wheelchairs
-  Rinsing
-  Coarse dirt absorption
-  Rollable


### Recommended for:

-  Private Homes
-  Office buildings
-  Schools

Height	Bar distance	Profile	Walking Area	Weight per m <sup>2</sup>
22 mm	3 / 5 mm	Aluminum	Rubber, Cassette Brush	approx. 14,7 kg (with 5 mm bar spacing)

### System Design

- 1 Rubber
- 2 ARWEI-Cassette Brush
- 3 Aluminum profile
- 4 ARWEI special connector, without cable connections

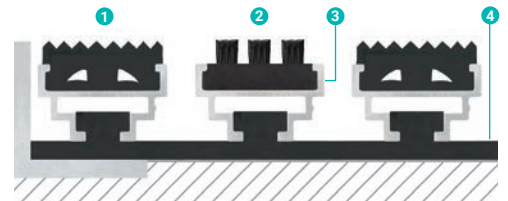

### Characteristics

- High stability up to 1200 kg per 80 cm<sup>2</sup> static point load
- V-profile form with increased solid dirt collection of 8,6 litres per m<sup>2</sup>

### Vorteile

- ARWEI-Premium-Reinstreifer is manufactured as a modular system. Every single part can be replaced easily on the spot.
- The profiles are rear-ventilated. The air can circulate. The Reinstreifer dries quickly and does not smell.
- V-shape profiles collect almost 30-100% more dirt than box-type systems. The result is: longer cleaning intervals and reduced cleaning costs.
- The rubber profiles and cassette brushes are fixed in a covered manner to prevent slipping sideways.
- The special profile geometry of the ARWEI Reinstreifer allows for high strain, for example for driving over with wheel chairs.

## Tender specifications: Tradition GCB 22

High quality, especially wear-resistant entrance mat, improved absorption of coarse dirt

**Application:** Indoor and roofed exterior; normal up to extremely strong frequency, suitable for wheelchairs, overall laying, Static point loading up to 1200 kg per 80 cm<sup>2</sup>

**Stripe supporting profile:** aluminium, V-shaped; 3 mm ground clearance, uncoupled, sound-absorbing, rinsing, rear ventilated

**Cleaning pads:** Rubber and cassette brush alternating

**Rubber profiles:** serrated lengthways; high quality material mix, colour black; slip resistance R 9 according to DIN 51130

**Cassette brush:** with bristle bundles arranged parallel to one another, colour black, slip resistance R 12 according to DIN 51130

**Connection:** ARWEI Special Connectors (patented in 1977); therefore easily to roll up, modular construction – no wire or cable connections -, each part can easily be replaced on the spot

**Height:** 22 mm

**Bar distance 3 mm:** Coarse dirt absorption 7.7 l / m<sup>2</sup>

**Bar distance 5 mm:** Coarse dirt absorption 8.6 l / m<sup>2</sup>

Angle frames in 25 x 25 x 3 mm are available in aluminum, brass or stainless steel.



ARWEI REINSTREIFER  
IN AKTION.

[www.youtube.com/arweitv](https://www.youtube.com/arweitv)



You Tube

Konstruktive und materialbedingte Änderungen im Zuge der Produktpflege vorbehalten. Alle Maßangaben sind Standardwerte ohne Berücksichtigung fertigungstechnisch bedingter Toleranzen. Sie beruhen auf unseren Erfahrungen und sorgfältigen Untersuchungen. Die Vielfalt der mitverwendeten Materialien sowie die unterschiedlichen Baustellen- und Verarbeitungsbedingungen können von uns jedoch nicht im Einzelnen überprüft oder beeinflusst werden. Die Qualität der Montage hängt deshalb von der fachmännischen Baustellenbeurteilung und Produktverwendung ab. Im Zweifelsfall Eigenversuche durchführen oder anwendungstechnische Beratung einholen. Mit dem Erscheinen dieses Produktdatenblattes verlieren alle vorausgegangenen Produktdatenblätter ihre Gültigkeit. Die jeweils aktuelle Fassung dieses Datenblatts finden Sie auf unserer Homepage unter [www.arwei.de](http://www.arwei.de).